




GENERAL BEARING IMPORT COMPANY

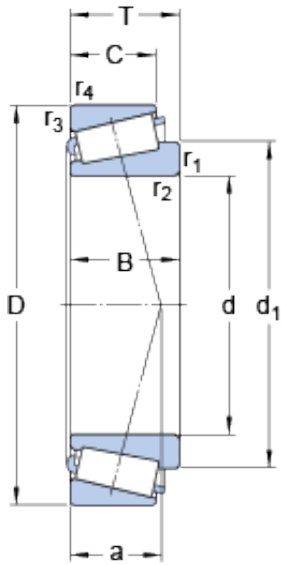

40 mm x 80 mm x 23 mm SKF 32208 J2/Q
AUSTRIA Bearing 40*80*24.75

Bearing No. 32208 J2/Q

32208 J2/Q Bearing 2D drawings and 3D CAD models

Size	80x40x24.75 mm
Bore Diameter	80 mm
Outer Diameter	40 mm
Width	24,75 mm
d	40 mm
D	80 mm
T	24.75 mm
d ₁	58.45 mm
B	23 mm
C	19 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1.5 mm
a	19 mm
d _a - max.	48 mm
d _b - min.	47 mm
D _a - min.	68 mm
D _a - max.	73 mm
D _b - min.	75 mm
C _a - min.	3 mm
C _b - min.	55 mm
r _a - max.	1.5 mm
r _b - max.	1.5 mm
Basic dynamic load rating - C	74.8 kN
Basic static load rating - C ₀	86.5 kN



GENERAL BEARING IMPORT COMPANY

Fatigue load limit - P _u	9.8 kN
Reference speed	6300 r/min
Limiting speed	8500 r/min
Calculation factor - e	0.37
Calculation factor - Y	1.6
Calculation factor - Y ₀	0.9
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.544
Product Group	B04334
bore diameter:	40 mm
operating temperature range:	Maximum of +250 ° F
cup width:	19 mm
dynamic load capacity:	74.8 kN
assembly type:	Cone & Cup
static load capacity:	86.5 kN
outside diameter:	80 mm
finish/coating:	Uncoated
cone width:	23 mm
maximum rpm:	8500 RPM
closure type:	Open
series:	322
cage material:	Steel
flange type:	Non-Flanged Cup